


OFFICE OF THE MARION COUNTY SURVEYOR
SECTION RECORD CORNER
SECTION 26 TOWNSHIP 16 RANGE 2
DATE: --6-8-99-- 5-24-05
PARTY CHIEF: Kiste
CREW: _____
TYPE OF MARKER: Harrison
METHOD OF ESTABLISHMENT: County 9-30-94

IN. S.P.C. E ZONE, NAD 83
NAME: 16022604
N: 505630.8540(m)
E: 46716.1788(m)

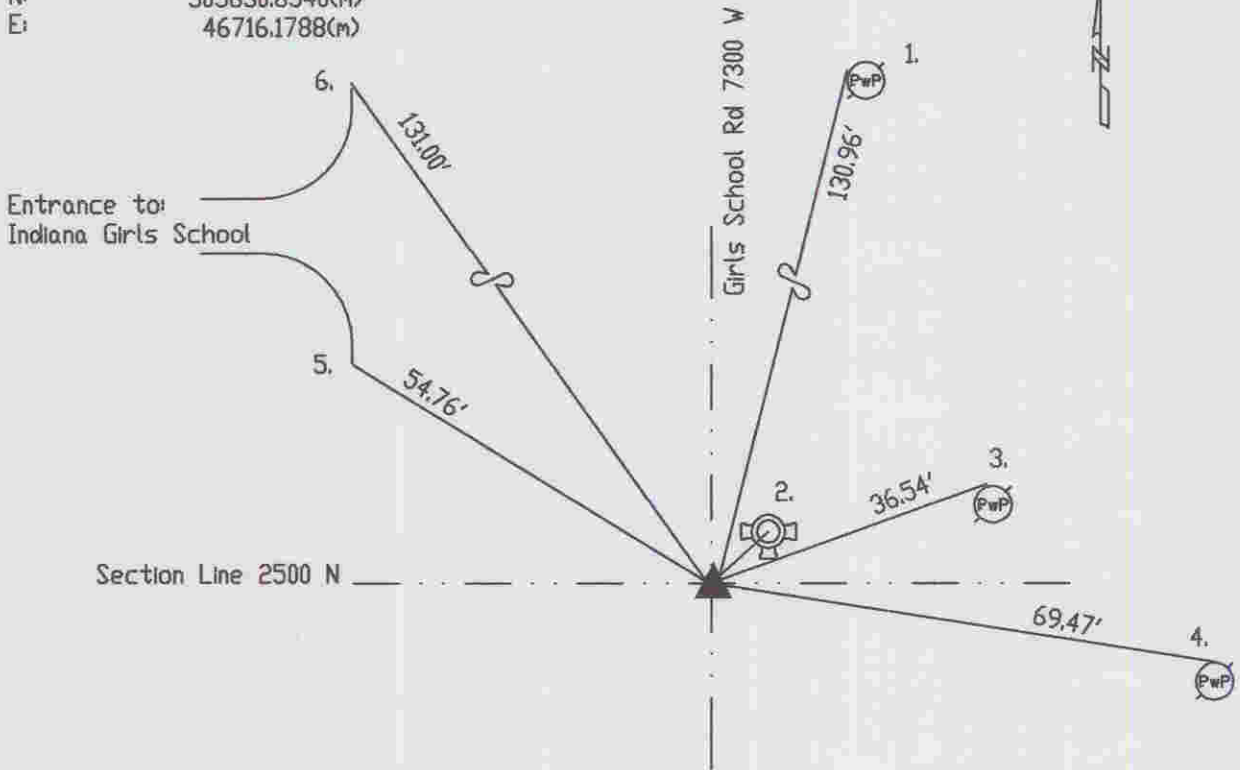

Original post set 1821 by Laughlin with witnesses: 12" beech N 35 E 27 links, 10" hickory S 48 W 19 links per Marion County Atlas pg. 3. Legal Survey of 27-16-2, 11-1848 by Hosbrook per Wayne Township Legal Survey Book pg. 13 & 14 called corner 'B' notes no witnesses standing nor type of monument. 5-1849 Hosbrook performed a Legal Survey of 26-16-2. No description of monument; however, equal distances of 40.48 chains (2671.68') given to corners to N & S. '40's tie called Railroad spike. PK nail found and re-tied 3-1975 by Miller. 10-83 Stoeppelwerth believed corner fell 30' S of PK nail. 11-83 Cleveland dug. PK nail found and Railroad spike found checked with ties. Cleveland dug 30' S and found a Railroad spike and stone. By deed, the distance from SW of Sec. 26 to W Q of Sec. 26 is 2671.5'. Compares with 1849 Legal od 2671.68'. Green measured w/EDM found 2669.0'. Re-tied 9-30-94 by Kiste. Re-tied 6-8-99 by Kiste.

HC622604

REF.	DISTANCE	DESCRIPTION
1.	130.96'	PK nail W wooden guard post
2.	41.55'	Top nut of fire hydrant
3.	36.54'	PK nail NW PwP#49-452A 12"up
4.	69.47'	PK nail N PwP#61-452A 12"up
5.	54.76'	SE brick column
6.	131.00'	NE brick column for (Entrance fo Indiana Girls School #2596)